


TECHNICAL DATA SHEET LOOSE RIBBON GOLD PLUS



Index

Product details	. 2
Dimension and characteristics	3

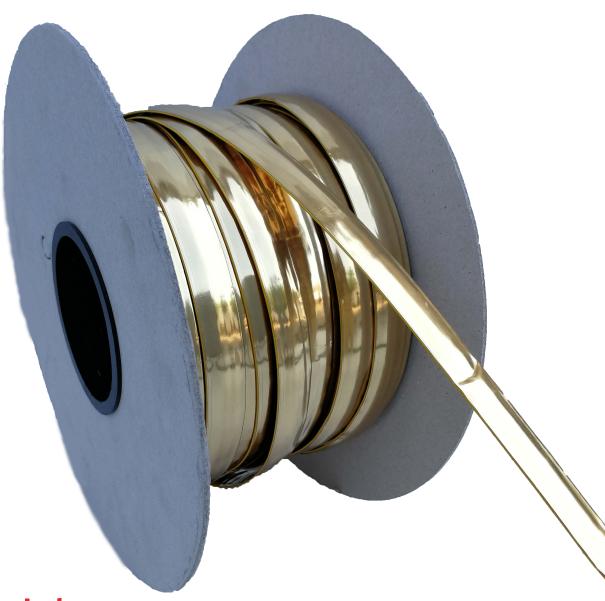







The **loose ribbon Gold Plus** is made with a coating of a polyimide film combined with a metallic PET golden colored that acts as vapor barrier, a material with high thermal properties and very resistant to chemical agents that allows Warmset to offer this product with the exclusive **lifetime** warranty.

Warmset's Gold Plus loose ribbon can be positioned either directly underneath the **final surface** (installation in tile glue) **or in screed**. Thanks to the hard sticking properties of the retakk adhesive, the product may be installed quickly and easily to help you create a custom-made heating system.

The two-wire heating element exploits the convenience of power supply on one side only and the 3 m cold lead, of which it is possible to obtain longer lengths on request. The ribbon allows a more functional installation using the WarmNeep insulation and it can be used also on hard/dusty surfaces. Morover you can install the kit under a floating floor.

Installing the Gold Plus Neep kit reduces the thickness of the heating surface, eliminating the possibility of damage during installation and obtaining an ideal insulation for both winter and summer.



DIMENSIONS AND CHARACTERISTICS *LOOSE RIBBON GOLD PLUS*

7 W/m ~ 100 W/m ²					
Code	Length (m)	m ²	Power (W)		
BDGP-15-7	15	1	105		
BDGP-22,5-7	22,5	1,5	157,5		
BDGP-30-7	30	2	210		
BDGP-37,5-7	37,5	2,5	262,5		
BDGP-45-7	45	3	315		
BDGP-52,5-7	52,5	3,5	367,5		
BDGP-60-7	60	4	420		
BDGP-67,5-7	67,5	4,5	472,5		
BDGP-75-7	75	5	525		
BDGP-82,5-7	82,5	5,5	577,5		
BDGP-90-7	90	6	630		
BDGP-97,5-7	97,5	6,5	682,5		
BDGP-105-7	105	7	735		
BDGP-112,5-7	112,5	7,5	787,5		
BDGP-120-7	120	8	840		
BDGP-127,5-7	127,5	8,5	892,5		
BDGP-135-7	135	9	945		
BDGP-142,5-7	142,5	9,5	997,5		
BDGP-150-7	150	10	1050		
BDGP-165-7	165	11	1155		
BDGP-180-7	180	12	1260		
BDGP-195-7	195	13	1365		
BDGP-210-7	210	14	1470		
BDGP-225-7	225	15	1575		

10 W/m~150 W/m²					
Code	Length (m)	m ²	Power (W)		
BDGP-15-10	15	1	150		
BDGP-22,5-10	22,5	1,5	225		
BDGP-30-10	30	2	300		
BDGP-37,5-10	37,5	2,5	375		
BDGP-45-10	45	3	450		
BDGP-52,5-10	52,5	3,5	525		
BDGP-60-10	60	4	600		
BDGP-67,5-10	67,5	4,5	675		
BDGP-75-10	75	5	750		
BDGP-82,5-10	82,5	5,5	825		
BDGP-90-10	90	6	900		
BDGP-97,5-10	97,5	6,5	975		
BDGP-105-10	105	7	1050		
BDGP-112,5-10	112,5	7,5	1125		
BDGP-120-10	120	8	1200		
BDGP-127,5-10	127,5	8,5	1275		
BDGP-135-10	135	9	1350		
BDGP-142,5-10	142,5	9,5	1425		
BDGP-150-10	150	10	1500		
BDGP-165-10	165	11	1650		
BDGP-180-10	180	12	1800		
BDGP-195-10	195	13	1950		
BDGP-210-10	210	14	2100		
PDCP 225 10	225	15	2250		

13 W/m ~ 200 W/m ²				
Code	Length (m)	m ²	Power (W)	
BDGP-15-13	15	1	195	
BDGP-22,5-13	22,5	1,5	292,5	
BDGP-30-13	30	2	390	
BDGP-37,5-13	37,5	2,5	487,5	
BDGP-45-13	45	3	585	
BDGP-52,5-13	52,5	3,5	682,5	
BDGP-60-13	60	4	780	
BDGP-67,5-13	67,5	4,5	877,5	
BDGP-75-13	75	5	975	
BDGP-82,5-13	82,5	5,5	1072,5	
BDGP-90-13	90	6	1170	
BDGP-97,5-13	97,5	6,5	1267,5	
BDGP-105-13	105	7	1365	
BDGP-112,5-13	112,5	7,5	1462,5	
BDGP-120-13	120	8	1560	
BDGP-127,5-13	127,5	8,5	1657,5	
BDGP-135-13	135	9	1755	
BDGP-142,5-13	142,5	9,5	1852,5	
BDGP-150-13	150	10	1950	
BDGP-165-13	165	11	2145	
BDGP-180-13	180	12	2340	
BDGP-195-13	195	13	2535	
BDGP-210-13	210	14	2730	
BDGP-225-13	225	15	2925	

GUARANTEES AND CERTIFICATIONS









Warmset srl

Via Ettore Majorana, 1 36075 Montecchio Maggiore (VI) – Italia T. +39 0444 491328 – F. +39 0444 496757 info@warmset.com – www.warmset.com